


# Conducta Eurokran 4312

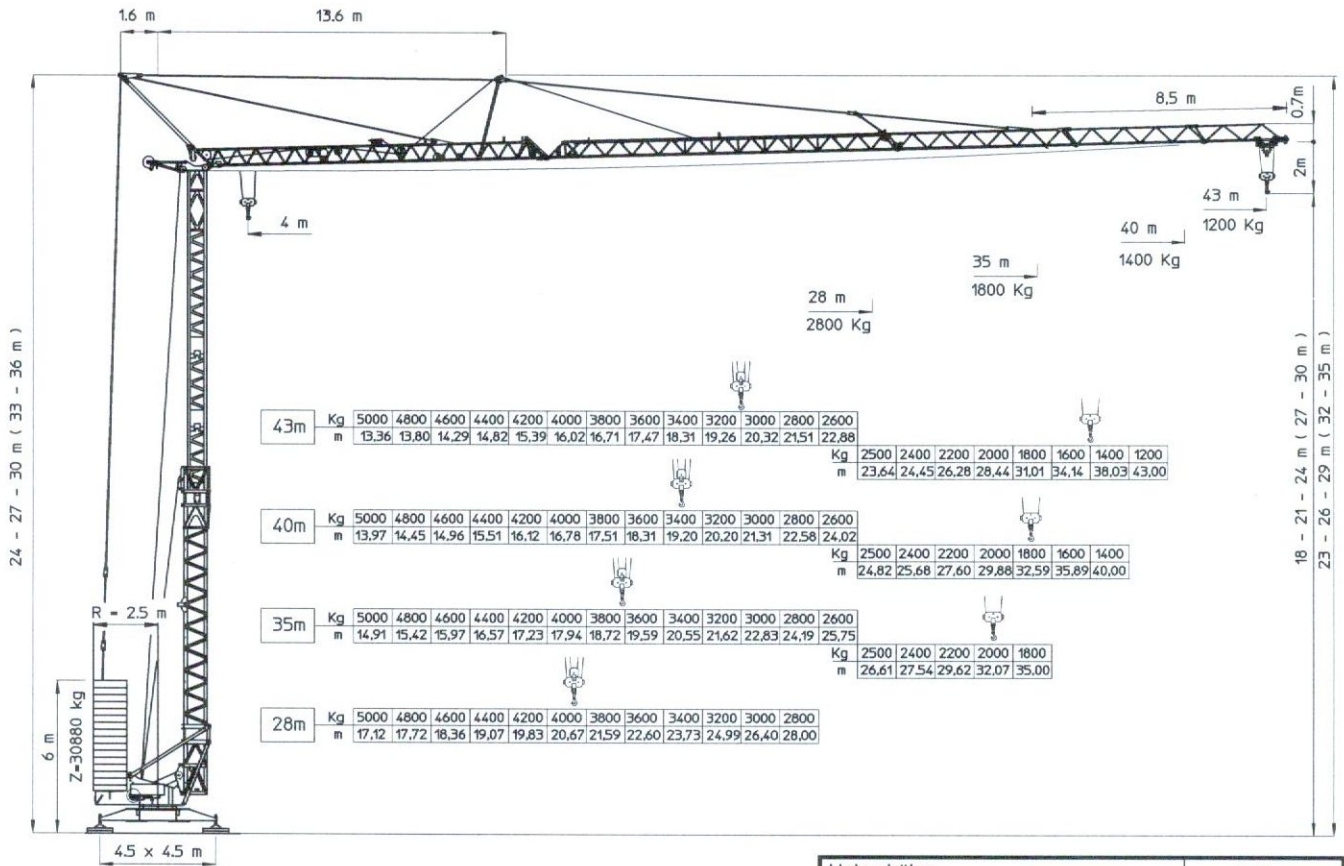

Sbraccio – Ausladung Luffing - Flechè	Portata – Tragkraft – Load - Charges							
	Kg		5000	2800	2500	1800	1400	1200
28,0 m	m		17,12	28,0				
35,0 m	m		14,91		26,61	35,0		
40,0 m	m		13,97		24,82		40,0	
43,0 m	m		13,36		23,64			43,0
18,5 Kw INVERTER					50 m/min.			1500 kg
					25 m/min.			2500 kg
					6,2 m/min.			2500 kg
					25 m/min.			3000 kg
					12,5 m/min.			5000 kg
4 Kw INVERTER								5000 kg
						15 / 30 / 60 m/min.		
6 Kgm INVERTER								
						0,2 / 0,5 / 0,8 1/min.		

Hakenhöhe	18,0 m
hauteur s/crochet	21,0 m
altezza al gancio	24,0 m
height of hook	(27-30 m)
Gegenballast	
contre poids	30.88 t
zavorra contrappeso	
counterweight	
Drehradius	
rayon de giration arrière	2,5 m
raggio di rotazione	
rotating radius	
Konstruktionsgewicht	
poids de la grue	18 t
peso della gru	
structural weight	
Abstützung	
ecartement	4,5 x 4,5 m
scartamento	
gauge (track)	
Eckdruck	
pression d'angle	31 t
pressione su uno stabilizzatore	
corner pressure	
Gesamt-Motorenleistung	
puissance totale des moteurs	25 kW
forza motrice totale	400 V - 50Hz
total motor output	
Kabelquerschnitt	
section du cable	4x16 mm <sup>2</sup>
sezione del cavo sottogomma	
cable section	

Konstruktionsänderungen vorbehalten !